


HIGH-Q WALL OUTLET SAT-IF

- Applicable for SAT-IF and terrestrial transmission
- Band filter for FM with low loss and high output isolation
- Loop through models: **SDD...QD** with DC-pass and diode isolated, e. g. for digital unicable solution with SUM or MSU
UNICABLE READY



Type	Frequency range	SEA 2400 Q	SDD 2410 QD	SDD 2419 QD	SDD 2424 QD	
Article-No.	1pcs-package 10pcs-package	1016 1442 1016 1399	5700 1527 -	5700 1442 -	5700 1443 -	
Description		terminal	loop through	loop through	loop through	
Attenuation						
TV OUT (IEC-male)	dB	4-68/125-862 MHz	1,0 - 2,0	12,0	19,0	24,0
FM OUT (IEC-female)	dB	87,5-108 MHz	1,0	11,0	19,0	24,0
SAT OUT (F-female)	dB	950-2200 MHz	1,5	13,0	19,0	24,0
Trunkline OUT	dB	5-862/950-2200 MHz	-	2,0/4,5	1,9/4,0	1,7/3,5
Isolation		5-65/85-862 MHz				
between the connector	dB	SAT <-> TV/RF	30	25	25	25
between the connector	dB	TV <-> RF	25	24	24	24
between the connector	dB	OUT <-> SAT/TV	-	22	22	22
DC pass		SAT	13/18 V / 22 kHz			
Weight	kg		0,1	0,1	0,1	0,1

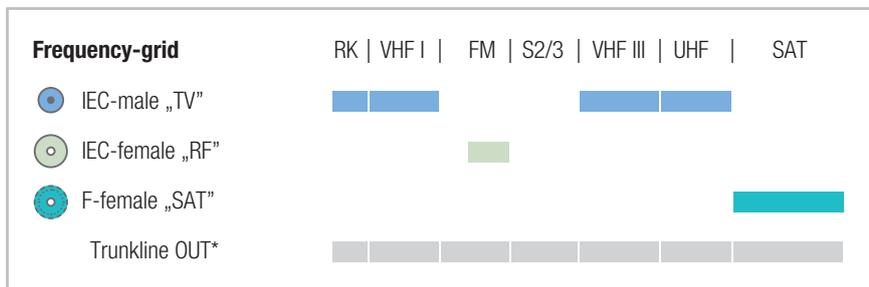

*only SDD 24xx QD