


CASCADE-MULTISWITCH

SCR Multiswitch for up to 16 subscribers per output

- II SAT + Terrestrial inputs (not suitable for return channel)
- II Approved for all SCR Standards
- II Supports Unicable 1 (4 UBs) and Unicable 2 (12 UBs)
- II **SKY® approved**
- II Remote powered or direct powered *
- II Made in Europe

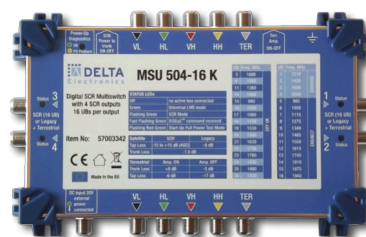

Type		MSU 504-16 K	
Item No.		57003342	
Frequency range	MHz	5...862	950...2150
Inputs		1	4
Outputs		1	4
Trough loss	db	3	
dSCR outputs		4	
dSCR User bands per output		16	
Output level dSCR	dBμV	96	
Return loss	dB	≥ 8	
Connectors		F female	
Power consumption	V	15 ... 20	
Power supply	W	<500 @ 20 V	
Dimensions	mm	223 x 143 x 50	

* Power supply from externally with an external plug-in power supply (e.g. NT 20-1.2 F; Item No. 57004430 or NT 20-3.3 F for the use of a cascade) or by remote feeding through trunk lines.

Type		MSU 508-16 K	
Item No.		57003345	
Frequency range	MHz	5...862	950...2150
Inputs		1	4
Outputs		1	4
Trough loss	db	3	
dSCR outputs		8	
dSCR User bands per output		16	
Output level dSCR	dBμV	96	
Return loss	dB	≥ 8	
Connectors		F female	
Power consumption	V	15 ... 20	
Power supply	W	<500 @ 20 V	
Dimensions	mm	223 x 223 x 50	

* Power supply from externally with an external plug-in power supply (e.g. NT 20-1.2 F; Item No. 57004430 or NT 20-3.3 F for the use of a cascade) or by remote feeding through VL-trunk lines.